
MEDIUM VOLTAGE AC DRIVES

ABB general purpose drives

ACS580MV

3.3 kV to 11 kV, 200 kW to 6300 kW

Catalog



**The simplicity you require. The efficiency
you expect.**

Table of contents


04-05	The all-compatible ACS580MV general purpose drive
06-07	Switch on simplicity without trading off efficiency
08	The reliable drive for a broad range of applications
09	How to select a drive
10	Technical data
11	Dimensions
12-15	Ratings, types and voltages
16	Standard interface and extensions for plug-in connectivity
17	Standard software with versatile features
18	Bluetooth connectivity provided by ACS580MV control panel PC tools for drive commissioning and process tuning capabilities
19	Flexible connectivity to automation networks
20	Input/output extension modules for increased connectivity Cabinet options Cooling
21	Safety features Manual bypass feature Specialities
22-23	ABB Ability™ Digital Powertrain
24-25	We keep your world turning
26-27	ABB Drives Life Cycle Management
28-31	Notes

The all-compatible ACS580MV general purpose drive

The ACS580MV is part of the all-compatible ABB drive portfolio. It turns complicated to simple while ensuring highest reliability.

The drive controls a wide range of applications in different industries, and yet it requires very little setting up or commissioning. All the essential features are built-in as standard, which reduces the need for additional hardware and simplifies drive selection. The drive is easy-to-use in terms of controlling pumps, fans, and many other applications.

What if you have other requirements? You can select another member of the all-compatible drives portfolio. The drives share the same user interfaces and options, enabling you to use the knowledge you have gained with the ACS580MV drives. You increasingly keep saving time, and saving time in business means saving money.

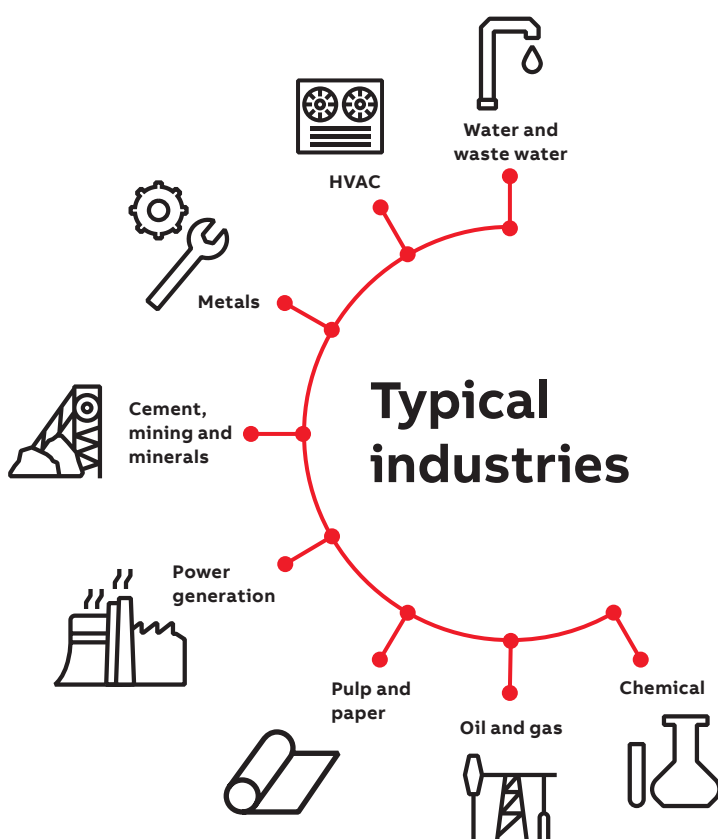



Switch on simplicity without trading off efficiency

The drive is easy to select, install and use. Built-in assistant functionality is helpful to easily operate and maintain the drive.

Simple to operate, safe to use

The standardized interface for fieldbus, I/O's, cable entry and breaker control in combination with emergency off and emergency stop functions ensure easy and safe drive operation.

Wireless enabled with Bluetooth panel

Control panel's assistants help to set up the drive quickly and effectively, You could easily monitor your drive operation status and fault diagnostic from your mobile devices.




Boosting energy efficiency

Energy efficiency information helps you monitor and save the energy used in your process. Energy optimizer function allows further energy savings.



After commissioning, the next time you will remember you own the drive is when you take a look at your new, lower energy bill.

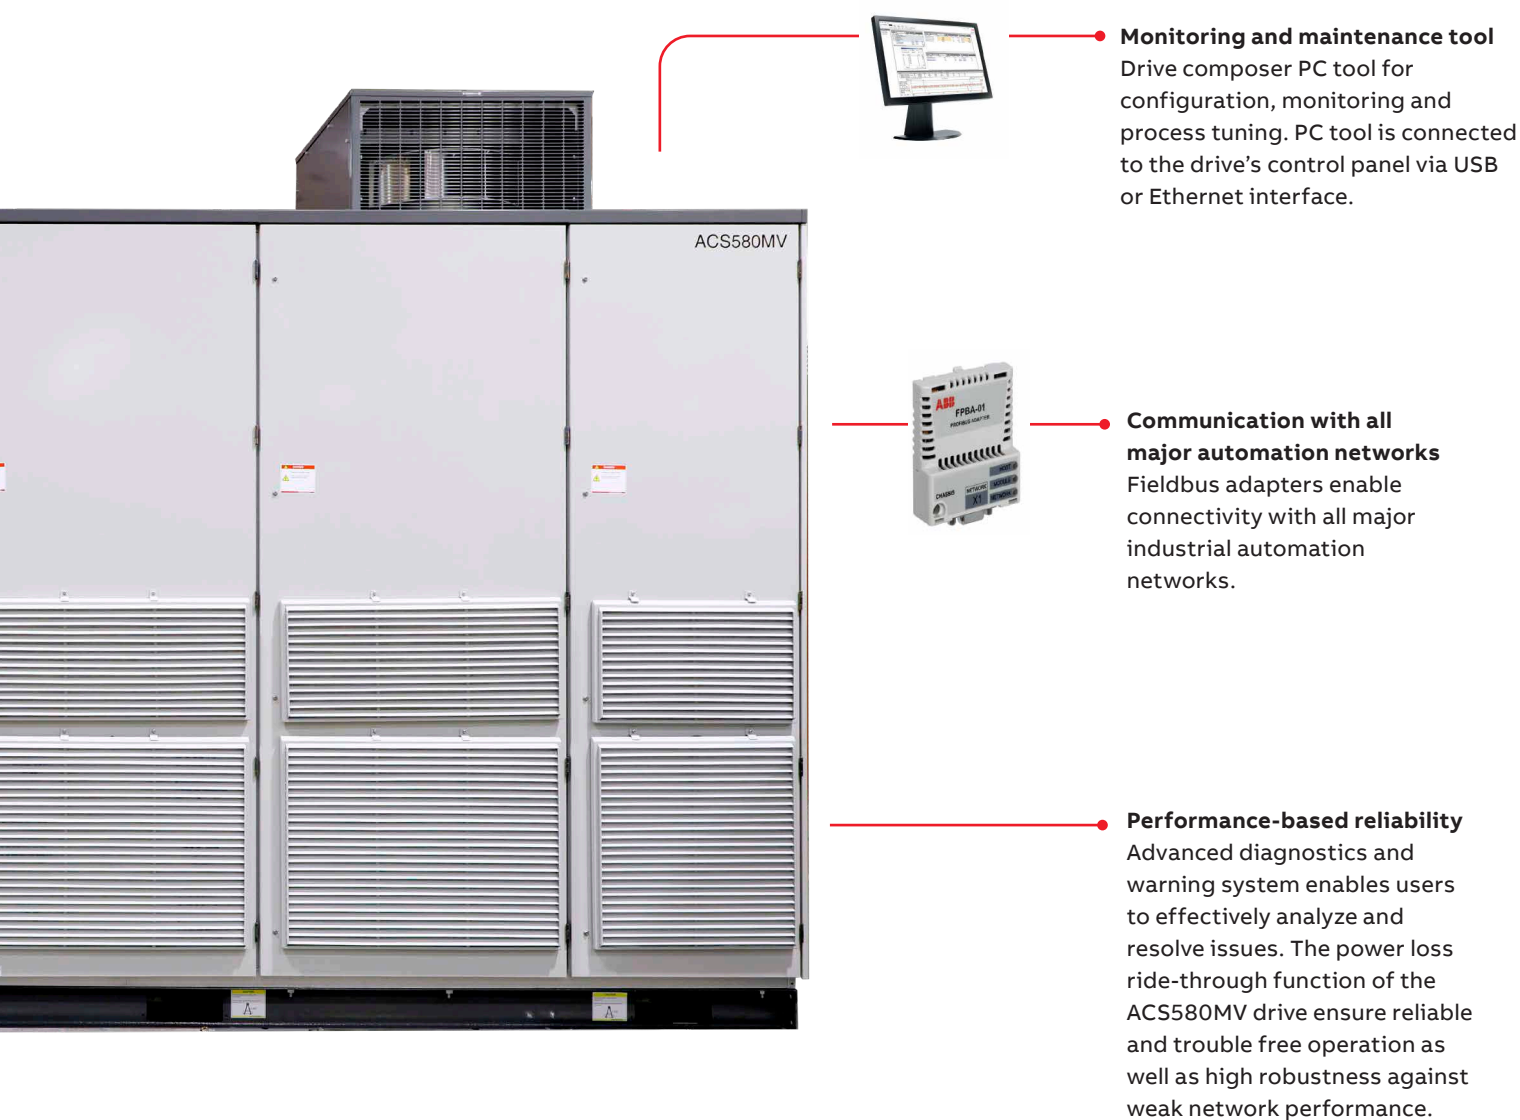

The image shows a large, grey ABB ACS580MV drive unit with three vertical sections and ventilation grilles at the bottom. A red line connects the top of the unit to a computer monitor displaying a software interface. Another red line connects the side of the unit to a small electronic module. A third red line connects the bottom of the unit to a text block.

Monitoring and maintenance tool
Drive composer PC tool for configuration, monitoring and process tuning. PC tool is connected to the drive's control panel via USB or Ethernet interface.

Communication with all major automation networks
Fieldbus adapters enable connectivity with all major industrial automation networks.

Performance-based reliability
Advanced diagnostics and warning system enables users to effectively analyze and resolve issues. The power loss ride-through function of the ACS580MV drive ensure reliable and trouble free operation as well as high robustness against weak network performance.

The reliable drive for a broad range of applications

The cabinet-built ACS580MV general purpose drive is designed to control pumps, fans, and many other applications like compressors as well as for process control in different industries. The drive is equipped with various features that simplify ordering and delivery, and reduces commissioning costs since everything is provided in a compact package.

All essential features for reliable operations

The drive features a new generation of cascaded h-bridge technology which, together with the drive's design, provides superior mitigation of harmonics in a compact design. Other built-in features like power loss ride-through ensures reliable and trouble free operation as well as high robustness against weak network performance. Features like IP42, redundant cooling fans and an advanced preventive warning system ensure highest reliability even in harsh industrial environments. The plug-in fieldbus adapter modules enable connectivity with all major automation systems. Other options like manual bypass provide high quality fit-to-purpose feature for ACS580MV targeted industries and applications. The drive and all options have coated boards as standard improving durability in rough surrounding conditions.

Easy to use control panel and PC tool

The control panel and PC tool provide effective drive operation, monitoring and maintenance. The control panel's straightforward settings menu and many built-in assistants ensure easy usage while the Drive composer PC tool offers extensive drive monitoring and process tuning capabilities.

Boosting energy efficiency

The built-in energy efficiency calculators, including used and saved kWh, CO2 reduction and money saved, help users finetune processes to ensure optimal energy use.

ACS580MV goes digital

With ACS580MV control panel, you could connect your device with your mobile sets and simplify the troubleshooting and maintenance task.

Remote assistance and condition monitoring is also featured with ACS580MV. Customer could get rapid response from ABB expert in case of site issue and even preventive failure alert.



Shared features of the ABB all-compatible drives portfolio

Same user interface

The drives follow the same operation logic and yet, there is an optimal drive from the smallest water pump to the biggest cement kiln, and everything in the between. When you have learned to use one drive, it is easy to use other drives in the portfolio.

Same PC tools

Free Drive Composer entry available at www.abb.com.

Simple connectivity

- The ACS580MV supports F-series fieldbus adapters used in the ABB all-compatible platform
- Mobile phone connectivity via the Bluetooth assistant control panel
- Fieldbus settings are made easy with the redesigned simple settings menu

The same parameter structure makes the all-compatible platform easy to use.

How to select a drive

It is very easy to select the right drive.

Start with identifying your motor voltage.

This tells you what rating table to use. The ACS580MV currently supports voltage from 3.3kV to 11kV. See page 12-15.

Select your drive's ordering code from the rating table based on your motor's nominal power rating.

Choose your motor's nominal power rating from the ratings table on See page 12-15.

12 ABB MEDIUM VOLTAGE AC DRIVES | ACS580MV, CATALOG

Ratings, types and voltages

Loadprofile 3.3 kV				Loadprofile 4.16 kV			
P_n kW	P_n hp	Type designation	Frame size	P_n kW	P_n hp	Type designation	Frame size
$U_n = 3.3 kV$ The power ratings are valid at nominal voltage 3.3 kV.							
215	402	ACS580MV-07-0088A-033	3.384	300	402	ACS580MV-07-0088A-040	4.1684
255	476	ACS580MV-07-0077A-033	3.284	270	466	ACS580MV-07-0066A-040	4.1684
380	500	ACS580MV-07-0082A-033	3.384	450	653	ACS580MV-07-0077A-040	4.1684
450	603	ACS580MV-07-0097A-033	3.384	480	643	ACS580MV-07-0088A-040	4.1684
500	670	ACS580MV-07-0088A-033	3.384	500	687	ACS580MV-07-0088A-040	4.1684
550	751	ACS580MV-07-0133A-033	3.386	600	804	ACS580MV-07-0133A-040	4.1685
600	845	ACS580MV-07-0136A-033	3.386	670	888	ACS580MV-07-0136A-040	4.1686
710	950	ACS580MV-07-0155A-033	3.386	710	1000	ACS580MV-07-0155A-040	4.1686
800	1086	ACS580MV-07-0175A-033	3.387	800	1086	ACS580MV-07-0175A-040	4.1687
1000	1340	ACS580MV-07-0217A-033	3.387	1000	1340	ACS580MV-07-0217A-040	4.1687
1100	1500	ACS580MV-07-0238A-033	3.388	1100	1500	ACS580MV-07-0238A-040	4.1687
1200	1676	ACS580MV-07-0258A-033	3.388	1200	1676	ACS580MV-07-0258A-040	4.1687
1400	1877	ACS580MV-07-0303A-033	3.388	1400	1877	ACS580MV-07-0303A-040	4.1688
1500	2011	ACS580MV-07-0324A-033	3.389	1500	2011	ACS580MV-07-0324A-040	4.1688
1600	2145	ACS580MV-07-0345A-033	3.389	1600	2145	ACS580MV-07-0345A-040	4.1689
1800	2300	ACS580MV-07-0404A-033	3.389	1800	2300	ACS580MV-07-0404A-040	4.1689
2000	2468	ACS580MV-07-0453A-033	3.389	2000	2468	ACS580MV-07-0453A-040	4.1689

Normal Ratings
 P_n Typical motor power at normal use
 I_n Continuous current rating at 40°C, allowing 10% I_n for 1 min every 10 min

12 ABB MEDIUM VOLTAGE AC DRIVES | ACS580MV, CATALOG

Ratings, types and voltages

Loadprofile 3.3 kV				Loadprofile 4.16 kV			
P_n kW	P_n hp	Type designation	Frame size	P_n kW	P_n hp	Type designation	Frame size
$U_n = 3.3 kV$ The power ratings are valid at nominal voltage 3.3 kV.							
215	402	ACS580MV-07-0088A-033	3.384	300	402	ACS580MV-07-0088A-040	4.1684
255	476	ACS580MV-07-0077A-033	3.284	270	466	ACS580MV-07-0066A-040	4.1684
380	500	ACS580MV-07-0082A-033	3.384	450	653	ACS580MV-07-0077A-040	4.1684
450	603	ACS580MV-07-0097A-033	3.384	480	643	ACS580MV-07-0088A-040	4.1684
500	670	ACS580MV-07-0088A-033	3.384	500	687	ACS580MV-07-0088A-040	4.1684
550	751	ACS580MV-07-0133A-033	3.386	600	804	ACS580MV-07-0133A-040	4.1685
600	845	ACS580MV-07-0136A-033	3.386	670	888	ACS580MV-07-0136A-040	4.1686
710	950	ACS580MV-07-0155A-033	3.386	710	1000	ACS580MV-07-0155A-040	4.1686
800	1086	ACS580MV-07-0175A-033	3.387	800	1086	ACS580MV-07-0175A-040	4.1687
1000	1340	ACS580MV-07-0217A-033	3.387	1000	1340	ACS580MV-07-0217A-040	4.1687
1100	1500	ACS580MV-07-0238A-033	3.388	1100	1500	ACS580MV-07-0238A-040	4.1687
1200	1676	ACS580MV-07-0258A-033	3.388	1200	1676	ACS580MV-07-0258A-040	4.1687
1400	1877	ACS580MV-07-0303A-033	3.388	1400	1877	ACS580MV-07-0303A-040	4.1688
1500	2011	ACS580MV-07-0324A-033	3.389	1500	2011	ACS580MV-07-0324A-040	4.1688
1600	2145	ACS580MV-07-0345A-033	3.389	1600	2145	ACS580MV-07-0345A-040	4.1689
1800	2300	ACS580MV-07-0404A-033	3.389	1800	2300	ACS580MV-07-0404A-040	4.1689
2000	2468	ACS580MV-07-0453A-033	3.389	2000	2468	ACS580MV-07-0453A-040	4.1689

Normal Ratings
 P_n Typical motor power at normal use
 I_n Continuous current rating at 40°C, allowing 10% I_n for 1 min every 10 min

Choose your options and spare part package according to your preference (on pages 19,20,21)

Type designation:

ACS580MV - 07 - 0143A - 100

Product series

Construction

Rating

Voltage

Flexible connectivity to automation networks

A Fieldbus enables communication between drives and PLC systems, I/O devices and the process. Fieldbus communication reduces wiring costs when compared with traditional hard-wired input/output connections. Fieldbus systems also offer the ability to gather large amounts of data.

The general purpose drives are compatible with a wide range of fieldbus protocols. The optional plug-in Fieldbus adapter modules can easily be mounted inside the drive.

The benefits of Fieldbus communication are described below.

Drive monitoring
A set of drive parameters and/or actual signals, such as torque, speed, current, etc., can be selected for cyclic data transfer, providing fast data access.

Drive diagnostics
Accurate and reliable diagnostic information can be obtained through the alarm, fault and fault words, giving easy interfacing with plantwide HMI.

Cabling
Substituting the large amount of conventional drive control cabling and wiring with a single cable reduces costs and increases system reliability and flexibility.

Design
The use of Fieldbus control reduces engineering time at installation due to the modular structure of the hardware and software and the simplicity of the connections to the drives.

Universal communication with ABB Fieldbus adapters
The ACS580MV supports the following fieldbus protocols:

Fieldbus adapter module	Fieldbus (2-wire module for 120 ohm or 2-wire module)	Options
PROFIBUS-DP master	PROFIBUS-DP master	PROFIBUS-DP master
PROFIBUS-DP slave	PROFIBUS-DP slave	PROFIBUS-DP slave
PROFIBUS-PA	PROFIBUS-PA	PROFIBUS-PA
PROFIBUS-PA	PROFIBUS-PA	PROFIBUS-PA
PROFIBUS-PA	PROFIBUS-PA	PROFIBUS-PA
PROFIBUS-PA	PROFIBUS-PA	PROFIBUS-PA



Technical data

Mains connection	
Voltage	3.3 to 13.8 kV $\pm 10\%$, (-25% with reduced power)
Supply frequency	50/60 Hz $\pm 5\%$
Power factor	$\cos\phi \geq 0.96$
Drive system efficiency (at nominal power)	> 96% (Including transformer)
Motor connection	
Voltage	3.3 to 11 kV
Frequency	0 to 120 Hz output, up to 80 Hz nominal motor frequency
Power range	3.3 kV: up to 2000 kW / 4.16 kV: up to 2500 kW / 6 kV: up to 3550 kW / 6.3 kV: up to 3500 kW / 6.6 kV: up to 4000 kW 10 kV: up to 5600 kW / 10.5 kV: up to 6300 kW / 11 kV: up to 6300 kW
Motor control	Scalar and vector control
Torque control	Torque step rise time: < 10 ms with nominal torque, Non-linearity: $\pm 5\%$ with nominal torque
Speed control	Static accuracy: 20% of motor nominal slip Dynamic accuracy: 1% seconds with 100% torque step
Overload	110 % (1 min/10 min)
Maximum motor cable length	1000 m
Output current THD	< 2%
Product compliance	
CE	
GOST-R	
Adjustable speed electrical power drive systems: EMC, IEC 61800-3: 2017	
Adjustable speed electrical power drive systems: General requirements, IEC 61800-4: 2002	
Adjustable speed electrical power drive systems: Safety requirements, IEC 61800-5-1:2007+A1:2016	
Adjustable speed electrical power drive systems: Safety requirements, IEC 61800-5-2: 2007	
Safety of machinery - Electrical equipment of machines: General requirements, IEC 60204-1: 2005	
Safety of machinery - Electrical equipment of machines: Requirements for HV equipment, IEC 60204-11: 2000	
Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems, IEEE 519-1992	
EU RoHS directive 2011/65/EU	
EMC	
According to IEC 61800-3: 2017; IEC 61000-4; EN 61000-6	
Environmental limits	
Ambient temperature	
Storage	-25 to +55 °C
Transport	-45 to +70 °C
Operation	0 to +40 °C, no frost allowed >40 °C, with derating
Cooling method	
Air-cooled	Dry clean air
Altitude	
0 to 2,000 m	Without derating
Above 2,000 m	Please contact ABB
Relative humidity	5 to 95 %, no condensation allowed
Degree of protection	IP21 as standard, IP42 as an optional variant
Contamination levels	No conductive dust allowed variant
Storage (excl. UPS)	IEC 60721-3-1: 2018, Class: 1K22/1B1/1C2/1S11/1M11
Transportation (excl. UPS)	IEC 60721-3-2: 2018, Class: 2K12/2B1/2C2/2S5/2M4
Operation	IEC 60721-3-3: 2019, Class: 3K22/3B1/3S6/3M11
* K = climatic conditions, B = biological conditions, C = chemically active substances, S = mechanically active substances, and M = mechanical conditions	

Dimensions

Voltage Class	Frame size	Height	Width	Depth	Weight
		mm	mm	mm	kg
3.3 kV	3.3R4	2821	2530	1198	3010
	3.3R5	2821	2530	1198	3280
	3.3R6	2821	2530	1198	3545
	3.3R7	2571	4630	1398	4780
	3.3R8	2571	4630	1398	5425
	3.3R9	2571	4830	1398	6275

Voltage Class	Frame size	Height	Width	Depth	Weight
		mm	mm	mm	kg
4.16 kV	4.16R4	2821	2530	1198	3360
	4.16R5	2821	2530	1198	3620
	4.16R6	2821	2530	1198	4100
	4.16R7	2571	4630	1398	5360
	4.16R8	2571	4630	1398	6020
	4.16R9	2571	4830	1398	7070

Voltage Class	Frame size	Height	Width	Depth	Weight
		mm	mm	mm	kg
6 / 6.3 kV	6R1	2571	4030	1198	2900
	6R2	2571	4030	1198	3100
	6R3	2571	4030	1198	3500
	6R4	2571	4030	1198	4000
	6R5	2571	4030	1198	4600
	6R6	2571	4230	1198	5000
	6R7	2571	5630	1398	7100
	6R8	2571	5630	1398	8800
	6R9	2571	5830	1398	9900

Voltage Class	Frame size	Height	Width	Depth	Weight
		mm	mm	mm	kg
10 kV	10R1	2571	4030	1198	3300
	10R2	2571	4030	1198	3700
	10R3	2571	4030	1198	4100
	10R4	2571	4430	1198	5100
	10R5	2571	4630	1198	5900
	10R6	2571	4630	1198	6600
	10R7	2571	6630	1398	10100
	10R8	2571	7030	1398	12300
	10R9	2571	7030	1398	13900

Voltage Class	Frame size	Height	Width	Depth	Weight
		mm	mm	mm	kg
6.6 kV	6.6R1	2571	4030	1198	3000
	6.6R2	2571	4030	1198	3300
	6.6R3	2571	4030	1198	3700
	6.6R4	2571	4030	1198	4300
	6.6R5	2571	4030	1198	4800
	6.6R6	2571	4230	1198	5600
	6.6R7	2571	6030	1398	7800
	6.6R8	2571	6230	1398	9500
	6.6R9	2571	6630	1398	10700

Voltage Class	Frame size	Height	Width	Depth	Weight
		mm	mm	mm	kg
10.5/11kV	11R1	2571	4030	1198	3500
	11R2	2571	4030	1198	4000
	11R3	2571	4030	1198	4400
	11R4	2571	4630	1198	5600
	11R5	2571	4630	1198	6000
	11R6	2571	4630	1198	7200
	11R7	2571	7430	1398	11200
	11R8	2571	7830	1398	13400
	11R9	2571	7830	1398	14900

Ratings, types and voltages

Loadprofile 3.3 kV				
Normal Use			Type designation	Frame size
P_N kW	P_N hp	I_{2N} A		
U _N = 3.3 kV The power ratings are valid at nominal voltage 3.3 kV				
315	422	68	ACS580MV-07-0068A-033	3.3R4
355	476	77	ACS580MV-07-0077A-033	3.3R4
380	509	82	ACS580MV-07-0082A-033	3.3R4
450	603	97	ACS580MV-07-0097A-033	3.3R5
500	670	108	ACS580MV-07-0108A-033	3.3R5
560	751	121	ACS580MV-07-0121A-033	3.3R6
630	845	136	ACS580MV-07-0136A-033	3.3R6
710	952	154	ACS580MV-07-0154A-033	3.3R6
810	1086	175	ACS580MV-07-0175A-033	3.3R7
900	1206	195	ACS580MV-07-0195A-033	3.3R7
1000	1340	217	ACS580MV-07-0217A-033	3.3R7
1120	1501	243	ACS580MV-07-0243A-033	3.3R8
1250	1676	271	ACS580MV-07-0271A-033	3.3R8
1400	1877	303	ACS580MV-07-0303A-033	3.3R8
1500	2011	325	ACS580MV-07-0325A-033	3.3R9
1600	2145	347	ACS580MV-07-0347A-033	3.3R9
1865	2500	404	ACS580MV-07-0404A-033	3.3R9
2000	2681	433	ACS580MV-07-0433A-033	3.3R9

Loadprofile 4.16 kV				
Normal Use			Type designation	Frame size
P_N kW	P_N hp	I_{2N} A		
U _N = 4.16 kV The power ratings are valid at nominal voltage 4.16 kV				
300	402	52	ACS580MV-07-0052A-040	4.16R4
370	496	64	ACS580MV-07-0064A-040	4.16R4
450	603	77	ACS580MV-07-0077A-040	4.16R4
480	643	82	ACS580MV-07-0082A-040	4.16R4
520	697	89	ACS580MV-07-0089A-040	4.16R5
600	804	103	ACS580MV-07-0103A-040	4.16R5
670	898	115	ACS580MV-07-0115A-040	4.16R6
750	1005	129	ACS580MV-07-0129A-040	4.16R6
870	1166	150	ACS580MV-07-0150A-040	4.16R6
1050	1408	180	ACS580MV-07-0180A-040	4.16R7
1120	1501	192	ACS580MV-07-0192A-040	4.16R7
1250	1676	215	ACS580MV-07-0215A-040	4.16R7
1490	1997	256	ACS580MV-07-0256A-040	4.16R8
1680	2252	289	ACS580MV-07-0289A-040	4.16R8
1750	2346	301	ACS580MV-07-0301A-040	4.16R8
1864	2499	320	ACS580MV-07-0320A-040	4.16R9
2010	2694	345	ACS580MV-07-0345A-040	4.16R9
2300	3083	395	ACS580MV-07-0395A-040	4.16R9
2500	3351	430	ACS580MV-07-0430A-040	4.16R9
2500	3351	430	ACS580MV-07-0430A-040	4.16R9

Nominal Ratings	
P_N	Typical motor power at normal use
I_{2N}	Continuous current rating at 40°C, allowing 110% I_{2N} for 1 min every 10 min

Ratings, types and voltages

Loadprofile 6 kV				
Normal Use			Type designation	Frame size
P_N kW	P_N hp	I_{2N} A		
U _N = 6 kV The power ratings are valid at nominal voltage 6 kV				
200	268	26	ACS580MV-07-0026A-060	6R1
225	302	30	ACS580MV-07-0030A-060	6R2
250	335	34	ACS580MV-07-0034A-060	6R2
280	375	38	ACS580MV-07-0038A-060	6R2
315	422	40	ACS580MV-07-0040A-060	6R2
355	476	49	ACS580MV-07-0049A-060	6R3
400	536	51	ACS580MV-07-0051A-060	6R3
450	603	53	ACS580MV-07-0053A-060	6R3
500	671	64	ACS580MV-07-0064A-060	6R4
560	751	72	ACS580MV-07-0072A-060	6R4
630	845	79	ACS580MV-07-0079A-060	6R4
710	952	88	ACS580MV-07-0088A-060	6R5
800	1073	98	ACS580MV-07-0098A-060	6R5
900	1207	105	ACS580MV-07-0105A-060	6R5
1000	1341	122	ACS580MV-07-0122A-060	6R6
1120	1502	137	ACS580MV-07-0137A-060	6R6
1250	1676	153	ACS580MV-07-0153A-060	6R6
1400	1877	169	ACS580MV-07-0169A-060	6R7
1600	2146	190	ACS580MV-07-0190A-060	6R7
1800	2414	205	ACS580MV-07-0205A-060	6R7
2000	2682	235	ACS580MV-07-0235A-060	6R8
2250	3017	263	ACS580MV-07-0263A-060	6R8
2500	3353	293	ACS580MV-07-0293A-060	6R8
2800	3755	328	ACS580MV-07-0328A-060	6R9
3150	4224	360	ACS580MV-07-0360A-060	6R9
3550	4761	410	ACS580MV-07-0410A-060	6R9

Loadprofile 6.3 kV				
Normal Use			Type designation	Frame size
P_N kW	P_N hp	I_{2N} A		
U _N =6.3kV The power ratings are valid at nominal voltage 6.3kV.				
220	295	25	ACS580MV-07-0025A-063	6.3R1
250	335	29	ACS580MV-07-0029A-063	6.3R2
280	375	32	ACS580MV-07-0032A-063	6.3R2
320	429	37	ACS580MV-07-0037A-063	6.3R2
375	503	43	ACS580MV-07-0043A-063	6.3R3
430	576	49	ACS580MV-07-0049A-063	6.3R3
520	697	0060	ACS580MV-07-0060A-063	6.3R4
610	818	0070	ACS580MV-07-0070A-063	6.3R4
700	938	0080	ACS580MV-07-0080A-063	6.3R4
780	1046	0089	ACS580MV-07-0089A-063	6.3R5
870	1166	0099	ACS580MV-07-0099A-063	6.3R5
1000	1340	0114	ACS580MV-07-0114A-063	6.3R6
1150	1542	0131	ACS580MV-07-0131A-063	6.3R6
1300	1743	0147	ACS580MV-07-0147A-063	6.3R6
1450	1944	0165	ACS580MV-07-0165A-063	6.3R7
1600	2145	0182	ACS580MV-07-0182A-063	6.3R7
1750	2346	0198	ACS580MV-07-0198A-063	6.3R7
2000	2681	0227	ACS580MV-07-0227A-063	6.3R8
2300	3083	0261	ACS580MV-07-0261A-063	6.3R8
2600	3485	0296	ACS580MV-07-0296A-063	6.3R8
2900	3887	0330	ACS580MV-07-0330A-063	6.3R9
3200	4290	0364	ACS580MV-07-0364A-063	6.3R9
3500	4692	0398	ACS580MV-07-0398A-063	6.3R9

Nominal Ratings	
P_N	Typical motor power at normal use
I_{2N}	Continuous current rating at 40°C, allowing 110% I_{2N} for 1 min every 10 min

Loadprofile 6.6 kV					
Normal Use			Type designation	Frame size	
P_N kW	P_N hp	I_{2N} A			
U _N = 6.6 kV The power ratings are valid at nominal voltage 6.6 kV					
250	335	0028	ACS580MV-07-0028A-066	6.6R1	
280	375	0031	ACS580MV-07-0031A-066	6.6R2	
315	422	0035	ACS580MV-07-0035A-066	6.6R2	
390	523	0042	ACS580MV-07-0042A-066	6.6R2	
450	603	0049	ACS580MV-07-0049A-066	6.6R3	
500	670	0055	ACS580MV-07-0055A-066	6.6R3	
580	777	0063	ACS580MV-07-0063A-066	6.6R4	
670	898	0073	ACS580MV-07-0073A-066	6.6R4	
750	1005	0082	ACS580MV-07-0082A-066	6.6R4	
800	1072	0087	ACS580MV-07-0087A-066	6.6R5	
900	1206	0098	ACS580MV-07-0098A-066	6.6R5	
1000	1340	0109	ACS580MV-07-0109A-066	6.6R5	
1150	1542	0125	ACS580MV-07-0125A-066	6.6R6	
1300	1743	0141	ACS580MV-07-0141A-066	6.6R6	
1500	2011	0163	ACS580MV-07-0163A-066	6.6R6	
1650	2212	0179	ACS580MV-07-0179A-066	6.6R7	
1800	2413	0195	ACS580MV-07-0195A-066	6.6R7	
2000	2681	0217	ACS580MV-07-0217A-066	6.6R7	
2250	3016	0244	ACS580MV-07-0244A-066	6.6R8	
2500	3351	0271	ACS580MV-07-0271A-066	6.6R8	
2700	3619	0293	ACS580MV-07-0293A-066	6.6R8	
3100	4155	0336	ACS580MV-07-0336A-066	6.6R9	
3600	4826	0390	ACS580MV-07-0390A-066	6.6R9	
4000	5362	0435	ACS580MV-07-0435A-066	6.6R9	

Loadprofile 10 kV					
Normal Use			Type designation	Frame size	
P_N kW	P_N hp	I_{2N} A			
U _N = 10 kV The power ratings are valid at nominal voltage 10 kV					
225	302	0017	ACS580MV-07-0017A-100	10R1	
250	335	0021	ACS580MV-07-0021A-100	10R1	
280	375	0024	ACS580MV-07-0024A-100	10R1	
355	476	0026	ACS580MV-07-0026A-100	10R1	
400	536	0033	ACS580MV-07-0033A-100	10R2	
450	603	0037	ACS580MV-07-0037A-100	10R2	
500	671	0039	ACS580MV-07-0039A-100	10R2	
560	751	0045	ACS580MV-07-0045A-100	10R3	
630	845	0049	ACS580MV-07-0049A-100	10R3	
710	952	0052	ACS580MV-07-0052A-100	10R3	
800	1073	0062	ACS580MV-07-0062A-100	10R4	
900	1207	0069	ACS580MV-07-0069A-100	10R4	
1000	1341	0075	ACS580MV-07-0075A-100	10R4	
1120	1502	0082	ACS580MV-07-0082A-100	10R5	
1250	1676	0091	ACS580MV-07-0091A-100	10R5	
1400	1877	0102	ACS580MV-07-0102A-100	10R5	
1600	2146	0116	ACS580MV-07-0116A-100	10R6	
1800	2414	0130	ACS580MV-07-0130A-100	10R6	
2000	2682	0143	ACS580MV-07-0143A-100	10R6	
2250	3017	0156	ACS580MV-07-0156A-100	10R7	
2500	3353	0176	ACS580MV-07-0176A-100	10R7	
2800	3755	0197	ACS580MV-07-0197A-100	10R7	
3150	4224	0219	ACS580MV-07-0219A-100	10R8	
3550	4761	0247	ACS580MV-07-0247A-100	10R8	
4000	5364	0278	ACS580MV-07-0278A-100	10R8	
4500	6035	0310	ACS580MV-07-0310A-100	10R9	
5000	6705	0340	ACS580MV-07-0340A-100	10R9	
5600	7510	0387	ACS580MV-07-0387A-100	10R9	
5600	7510	0387	ACS580MV-07-0387A-100	10R9	

Nominal Ratings	
P_N	Typical motor power at normal use
I_{2N}	Continuous current rating at 40°C, allowing 110% I_{2N} for 1 min every 10 min

Ratings, types and voltages


Loadprofile 10.5 kV					
Normal Use			Type designation	Frame size	
P_N	P_N	I_{2N}			
kW	hp	A			
U _N = 10.5 kV The power ratings are valid at nominal voltage 10.5 kV					
280	375	0017	ACS580MV-07-0017A-105	10.5R1	
315	420	0022	ACS580MV-07-0022A-105	10.5R1	
355	475	0024	ACS580MV-07-0024A-105	10.5R1	
390	525	0027	ACS580MV-07-0027A-105	10.5R1	
450	605	0031	ACS580MV-07-0031A-105	10.5R2	
500	670	0035	ACS580MV-07-0035A-105	10.5R2	
580	775	0040	ACS580MV-07-0040A-105	10.5R2	
630	845	0043	ACS580MV-07-0043A-105	10.5R3	
690	925	0047	ACS580MV-07-0047A-105	10.5R3	
750	1005	0051	ACS580MV-07-0051A-105	10.5R3	
900	1205	0062	ACS580MV-07-0062A-105	10.5R4	
1050	1410	0072	ACS580MV-07-0072A-105	10.5R4	
1200	1610	0082	ACS580MV-07-0082A-105	10.5R4	
1400	1875	0096	ACS580MV-07-0096A-105	10.5R5	
1550	2080	0106	ACS580MV-07-0106A-105	10.5R5	
1800	2415	0123	ACS580MV-07-0123A-105	10.5R6	
2050	2750	0140	ACS580MV-07-0140A-105	10.5R6	
2300	3085	0157	ACS580MV-07-0157A-105	10.5R6	
2500	3350	0171	ACS580MV-07-0171A-105	10.5R7	
2800	3755	0191	ACS580MV-07-0191A-105	10.5R7	
3100	4155	0211	ACS580MV-07-0211A-105	10.5R7	
3500	4690	0239	ACS580MV-07-0239A-105	10.5R8	
3900	5230	0266	ACS580MV-07-0266A-105	10.5R8	
4300	5765	0293	ACS580MV-07-0293A-105	10.5R8	
4900	6570	0334	ACS580MV-07-0334A-105	10.5R9	
5600	7505	0382	ACS580MV-07-0382A-105	10.5R9	
6300	8445	0429	ACS580MV-07-0429A-105	10.5R9	

Loadprofile 11 kV					
Normal Use			Type designation	Frame size	
P_N	P_N	I_{2N}			
kW	hp	A			
U _N = 11 kV The power ratings are valid at nominal voltage 11 kV					
250	335	0017	ACS580MV-07-0017A-110	11R1	
280	375	0019	ACS580MV-07-0019A-110	11R1	
315	422	0021	ACS580MV-07-0021A-110	11R1	
385	516	0025	ACS580MV-07-0025A-110	11R1	
450	603	0030	ACS580MV-07-0030A-110	11R2	
510	684	0034	ACS580MV-07-0034A-110	11R2	
585	784	0038	ACS580MV-07-0038A-110	11R2	
630	845	0041	ACS580MV-07-0041A-110	11R3	
710	952	0046	ACS580MV-07-0046A-110	11R3	
800	1072	0052	ACS580MV-07-0052A-110	11R3	
950	1273	0062	ACS580MV-07-0062A-110	11R4	
1100	1475	0072	ACS580MV-07-0072A-110	11R4	
1250	1676	0082	ACS580MV-07-0082A-110	11R4	
1400	1877	0091	ACS580MV-07-0091A-110	11R5	
1550	2078	0102	ACS580MV-07-0102A-110	11R5	
1800	2413	0117	ACS580MV-07-0117A-110	11R6	
2050	2748	0134	ACS580MV-07-0134A-110	11R6	
2350	3150	0153	ACS580MV-07-0153A-110	11R6	
2600	3485	0170	ACS580MV-07-0170A-110	11R7	
2850	3820	0186	ACS580MV-07-0186A-110	11R7	
3150	4223	0205	ACS580MV-07-0205A-110	11R7	
3600	4826	0235	ACS580MV-07-0235A-110	11R8	
4100	5496	0267	ACS580MV-07-0267A-110	11R8	
4600	6166	0300	ACS580MV-07-0300A-110	11R8	
5100	6836	0332	ACS580MV-07-0332A-110	11R9	
5700	7641	0370	ACS580MV-07-0370A-110	11R9	
6300	8445	0410	ACS580MV-07-0410A-110	11R9	

Nominal Ratings	
P_N	Typical motor power at normal use
I_{2N}	Continuous current rating at 40°C, allowing 110% I_{2N} for 1 min every 10 min

Standard interface and extensions for plug-in connectivity

The ACS580MV drives offer a wide range of standard interfaces. In addition, the drive has two option slots that can be used for extensions including fieldbus adapter modules and input/output extension modules. Predefined macros enable easy and fast configuration of customer I/O's. ACS580MV offers following 3 macros and configurations in standard which support most frequently used application requirements like sequential control for retrofit.

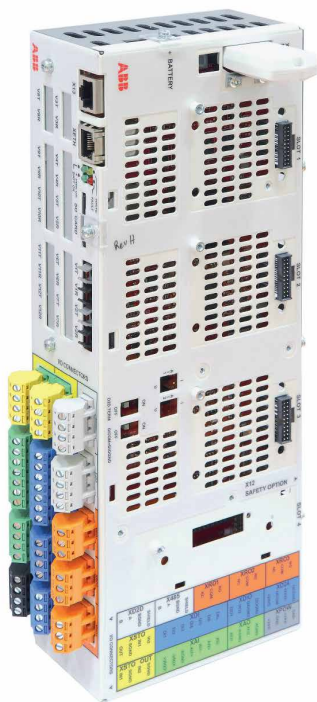

Central Controller

Default control connections for the factory macro

XPOW External power input		
1	+24V	24 V DC, 2 A (internally used)
2	GND	
XAI Reference voltage and analog inputs		
1	+VREF	10 V DC, $R_L 1 \dots 10 \text{ kohm}$
2	-VREF	-10 V DC, $R_L 1 \dots 10 \text{ kohm}$
3	AGND	Ground
4	AI1+	Speed reference
5	AI1-	0(2) ... 10V, $R_{in} > 200 \text{ kohm}$
6	AI2+	By default not in use.
7	AI2-	0(4) ... 20mA, $R_{in} > 100 \text{ ohm}$
XAO Analog outputs		
1	AO1	Motor speed rpm
2	AGND	0 ... 20mA, $R_L < 500 \text{ ohm}$
3	AO2	Motor current
4	AGND	0 ... 20mA, $R_L < 500 \text{ ohm}$
XRO1, XRO2, XRO3 Relay outputs		
11	NC	Ready
12	COM	250 V AC/ 30 V DC
13	NO	2A
21	NC	Running
22	COM	250 V AC/ 30 V DC
23	NO	2A
31	NC	Fault (-1)
32	COM	250 V AC/30 V DC
33	NO	2A
XD24 Digital interlock		
5	+24 VD	+24 V DC 200 mA
6	DICOM	Digital input ground
7	+24 VD	+24 V DC 200 mA
8	DIOGND	Digital input/output ground
XDIO Digital input/outputs		
1	DIO1	MCB trip command (internally used)
2	DIO2	MCB status closed (internally used)
XDI Digital inputs		
1	DI1	Stop (0) / Start (1)
2	DI2	Forward (0) / Reverse (1)
3	DI3	Reset
4	DI4	Acc/Dec time set 1 (0) / set 2 (1)
5	DI5	Constant speed 1 (1 = On)
6	DI6	By default, not in use

XI3 Control panel connection (internally used)

X205 Memory unit connection (internally used)

XETH PC ethernet connection for Drive Composer

Customer Interface Terminal Block

X1 Customer Interface Terminal Block		
1		floating contacts to customer making capability: 40 A thermal current: $I_{th} = 6 \text{ A @ } 40^\circ\text{C}$
3	MCB close cmd	
5		
7	MCB open cmd	breaking capability: AC-15 50 Hz $I_e(240 \text{ V})=4 \text{ A}$, $I_e(500 \text{ V})=2 \text{ A}$ DC-13 $I_e(24 \text{ V})=2.5 \text{ A}$, $I_e(110 \text{ V})=0.7 \text{ A}$, $I_e(240 \text{ V})=0.4 \text{ A}$
9		
11	MCB trip/unlock cmd 1	minimum load: 17 V, 5 mA isolation rated voltage 690 V AC
13		
15		
17		
19	MCB closed status	Connect contact from customer internal supply 24 Vdc, 5mA
21		
23	MCB open status	Connect contact from customer internal supply 24 Vdc, 5 mA, max resistance 140Ω
25		
27	MCB ready status	Connect contact from customer internal supply 24 Vdc, 5mA
29		
31	Emergency off 1	Connect contacts from customer Max resistance 60Ω.
33		
35	Emergency off 2	Emergency off 2 Internal supply, 24 Vdc, 25 mA
37		
41	Remote MCB close cmd	Connect contacts from customer internal supply 24Vdc, 5 mA
43		
45	Remote MCB open cmd	Switchable
47		
53	Alarm	RO, NC/NO can be selective, 250 V AC/24 V DC, 2A
55		
57	Emergency off reset	Optional, NC Connect contacts from customer
59		
61		
62		
63		
64		
65	24Vdc	24Vdc for digit input
66		
67		
68		

Standard software with versatile features

Commissioning faster than ever before

The DriveStartup tool has a clear, intuitive and visually advanced interface as well as different assistants to make the drive simple to set up. This saves on commissioning time.

Sophisticated process control

The ACS580MV drives offer sophisticated process control in scalar and vector control modes for induction motors. Many embedded protection and other features improve performance of the motor and process.

Flying start

Flying start is available for both scalar and vector control modes. The drive catches a running motor which is often required in applications with long freewheeling times, such as in fan applications.

Load profile

The load profile feature collects drive values such as current to a log. The log shows how the drive is operating and enables you to analyze and optimize the application.

PID built-in

Built-in and stand-alone PID makes the ACS580MV a selfgoverning unit that requires no external logic input from the control room, but requires only an external process measurement.

Optimizing energy use

The ACS580MV drives come with features that help you save and manage energy. You can monitor the hourly, daily and cumulative energy consumption via kWh counters. When the drive replaces a direct-online control, you can follow the saved energy, CO2 emissions or money, and see how fast the drive brings you a return on investment.

Easy diagnostics for trouble-free operation

The control panel's and Drive composer PC tool's diagnostics menu enables you to effectively analyze and resolve issues. You can quickly analyze why the drive is performing as it is; running, stopped or running at the present speed. Active faults, warnings and event logs are shown in the menu. The menu shows if there are any active limitations to the drive operation and gives instructions on how to resolve them. The entry level drive composer PC tool is available for free via the ABB website.



Bluetooth connectivity provided by ACS580MV control panel

Smooth navigation and process tuning

The control panel is equipped with context-sensitive soft keys and four-direction navigation enabling you to quickly browse and adjust the drive settings. Many flexible data visualizations including bar charts, histograms and trend graphs help you analyze the process. With the panel's text editor, you can for example add information to I/O signals or customize fault and warning messages. You can also label the drive with a unique name.

Bluetooth control panel

The standardized bluetooth panel for ACS580MV enables customers to monitor the drive operation status and fault diagnostics.

Easy drive maintenance

Powerful backup and restore functions (with name, date and content) are supported as well as different language versions. Faults or warnings are quickly resolved as the help key provides context sensitive guidance and troubleshooting instructions.



Bluetooth control panel

PC tools for drive commissioning and process tuning capabilities

The free version of the Drive composer PC tool provides monitoring and maintenance capabilities, while the professional version provides additional features such as custom parameter windows, control diagrams of the drive's configuration and improved monitoring and diagnostics.

The Drive composer tool is connected to the drive using the USB connection on the assistant control panel or an Ethernet connection on the drive. All drive information such as parameter loggers, faults, backups and event lists are gathered into a support diagnostics file. This provides faster fault tracking, shortens downtime and reduces operational and maintenance costs.

Drive composer pro offers extended functionality

Drive composer pro provides the same standard functionality as the free version, including parameter settings, downloading and uploading files and search parameters. Advanced features such as graphical control diagrams and various displays are also available. The control diagrams save users from browsing long lists of parameters and help to set the drive's logic quickly and easily.

The tool has fast monitoring capabilities of multiple signals from several drives in a PC tool network. Full backup and restore functions are also included.

DriveStartup ensures fast and high quality commissioning

For the effortless drive commissioning the DriveStartup tool is applied. DriveStartup guides step by step through the complete commissioning including reporting and ensures highest quality, reduced commissioning time and therefore reduced costs.



Flexible connectivity to automation networks

A fieldbus enables communication between drives and PLC systems, I/O devices and the process. Fieldbus communication reduces wiring costs when compared with traditional hard wired input/output connections. Fieldbus systems also offer the ability to gather large amounts of data.

The general purpose drives are compatible with a wide range of fieldbus protocols. The optional plug-in fieldbus adapter modules can easily be mounted inside the drive.

The benefits of fieldbus communication are described below.

Drive monitoring

A set of drive parameters and/or actual signals, such as torque, speed, current, etc., can be selected for cyclic data transfer, providing fast data access.

Drive diagnostics

Accurate and reliable diagnostic information can be obtained through the alarm, limit and fault words, giving easy interfacing with plantwide HMIs.

Cabling

Substituting the large amount of conventional drive control cabling and wiring with a single cable reduces costs and increases system reliability and flexibility.

Design

The use of fieldbus control reduces engineering time at installation due to the modular structure of the hardware and software and the simplicity of the connections to the drives.


Universal communication with ABB fieldbus adapters

The ACS580MV supports the following fieldbus protocols:

Fieldbus adapter modules

Fieldbus (2 slot available for I/O extension or fieldbus adapter)

Fieldbus Adapter	Option
PROFIBUS-DP adapter	FPBA-01
Modbus adapter	FSCA-01
EIP	FEIP-21
Modbus/TCP	FMBT-21
PROFINET	FPNO-21
DeviceNet	FDNA-01

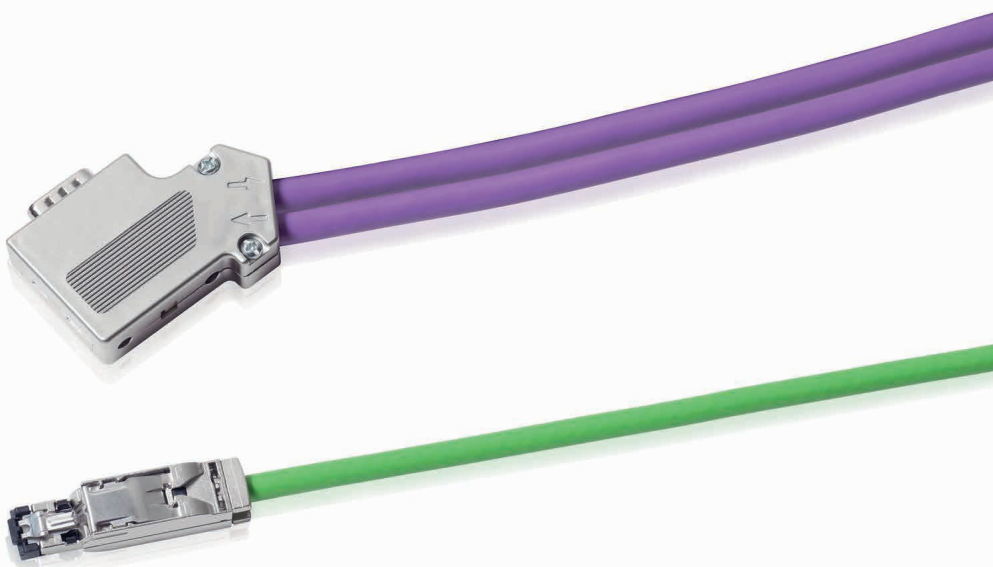

Input/output extension modules for increased connectivity

Standard input and output can be extended by using optional analog and digital input/output extension modules. The modules are easily installed in the extension slots located on the main controller.

Typical functions like motor fan on/off can be easily configured by using FIO-11 and FIO-01 modules.

Analog and digital input/output extension modules

Connections	Options
4 x DI/O, 2 x RO	FIO-01
3 x AI (mA/V), 1 x AO (mA), 2 x DI/O	FIO-11
2 x AI (mA/V), 2 x AO (mA)	FAIO-01

Cabinet options

The ACS580MV is available with IP42 protection class, thus ensuring a reliable operation of the drive even under harsh environmental conditions.

As an option, the ACS580MV can be equipped with a cabinet heater that prevents humidity condensation inside the cabinet when the drive is not powered such as during plant maintenance or drive shut down time.

The optional low power auxiliary supply package does not require 380 V power supply and is the ideal solution in order to ensure safe line control power supply using customer UPS. This option is also available with a built-in UPS which is recommended in case of an unreliable auxiliary supply.

Cabinet option	Description
Converter cabinet and motor space heater	Additional external 220–240V power supply required
Low power aux supply package	External single phase supply 100–240 V AC or 90–350 V DC, 3 phase fan supply from internal main transformer. Ideal for safe line control power supply.
Low power aux supply package + int. UPS	External single phase supply 100–240 V AC or 90–350 V DC and internal UPS (~15 min), 3 phase fan supply from internal main transformer. Ideal for high availability in case of unreliable aux. supply.

Cooling

The ACS580MV is fitted with cooling air fans. The cooling air must be free from corrosive materials, humidity and dust. The air temperature should not be above the maximum ambient temperature of 40 °C (50 °C with derating). Before installation please check the information in the technical datasheets.

Optional redundant cooling fans ensure an automatic switch to an additional fan in case of

cooling problems and guarantee highest reliability in the process operation. Furthermore, a special interface for the fan box is optional available in order to attach an air duct to the drive cabinet.

Cooling option

Redundant cooling fans
Fanbox for air duct connection

Safety features

The integrated emergency off and emergency stop function safety for machine operators and is optionally available with SIL_{CL}3/PLe certification.

Safety feature

Emergency Stop, Category 0 with opening main contactor/breaker (SIL_{CL}3/PLe)

Manual bypass feature

Enable highest availability of any application that operate direct-on-line (DOL). Risk management for customer retrofitting existing DOL motors with drives.



Specialities

Special environmental conditions and applications require a need-oriented selection and configuration of the drives. The ACS580MV offers a wide range of specialties which can be selected and might determine derating of the drive.

Different supply main voltage than drive output voltage is optionally available and covered by

integrated transformer. Extreme environmental conditions such as extended ambient temperature or a high altitude need special consideration when configuring the drive and may have an impact on the cabinet size.

ABB Ability™ Digital Powertrain

Condition monitoring for drives



Accurate, real-time information about powertrain events. When you have the facts, you can make the right decisions.

Condition Monitoring gives you fact-based insight into your powertrain assets, such as drives and motors, via KPIs and signal data, to identify irregularities before they become problems. This helps you make proactive decisions, built on real-time information – and saves you money!

The service can be tailored to fit your needs

Our standard package gives you industry leading monitoring capabilities – whether you want to view the drive status through ABB's Internet portal or integrate this data with your existing monitoring systems.

The standard package includes the following services:

- Condition Monitoring
- Alarm Management
- Asset Health
- Team Support
- Backup Management

The standard package can be supplemented with optional services:

- Condition-Based Maintenance
- Offline Data Collection
- Expert Reports
- Remote Assistance
- Condition monitoring of your entire powertrain



Solid fact-based decision making

Get the facts, and the history, to help run your operations better and more safely.



Always stay one step ahead of problems

Recognize early signs of possible failures and assess the risks, before they turn into serious operational issues.



Find the root cause of process issues

Remotely access data from ABB drives built-in sensors to track the cause of problems. Get back to smooth operation quickly with data back-ups.




Remotely analyze and optimize drives

Get critical drive information anywhere anytime – even in difficult to access sites, or when a site visit is impossible.


NETA-21

NETA-21 connects the drive to the cloud via the Internet or local Ethernet network.

- The module comes with a built-in web server and requires no Flash/Java plugins
- In the absence of a customer local area network, it can be connected via a mobile network router (either Ethernet or USB network adapter)
- One module can be connected to several drives at the same time

NETA-21	Ordering code	Description
	3AUA0000094517	2 x panel bus interface
		max. 9 drives
		2 x Ethernet interface
		SD memory card

Customers can configure powertrains and customize the digital service plan

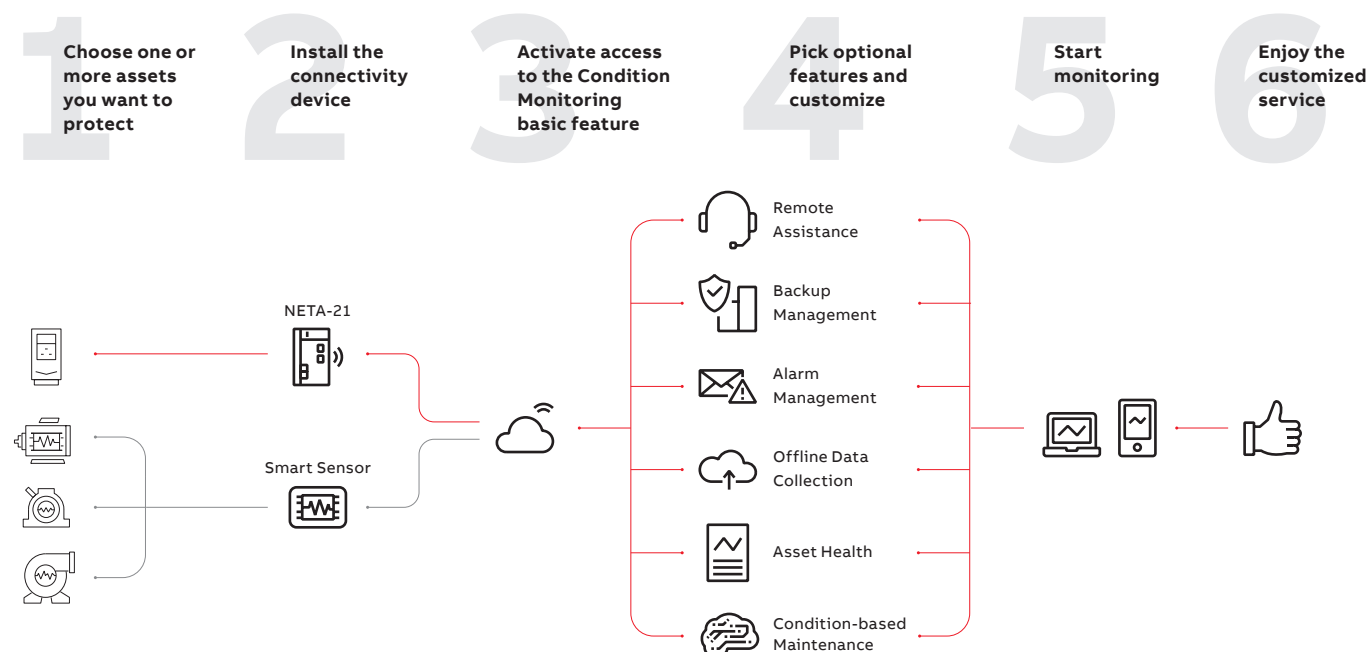

We keep your world turning

Whatever your needs are, we offer the most extensive service offering for drives, motors and generators from spare parts and technical support to cloud-based condition monitoring solutions to keep your equipment running.

The global ABB service units complemented by external Value Providers form a service network on your doorstep. Maximize performance, uptime and efficiency throughout the life cycle of your assets.

With you every step of the way

Even before you buy a generator, drive, motor, bearing or softstarter, ABB's experts are on hand to offer technical advice from dimensioning through to potential energy saving.

When you've decided on the right product, ABB and its global network of Value Providers can help with installation and commissioning. They are also on hand to support you throughout the operation and maintenance phases of the products life cycle, providing maintenance programs tailored to your facility's needs.

ABB will ensure you are aware of any service opportunities. If you've registered your drives and motors with ABB, then its engineers will proactively contact you advising on your most effective service options. All of which helps maximize performance, uptime and efficiency throughout the lifetime of your powertrain.



Replacements

Fast and efficient replacement services to minimize production downtime.




End-of-life services

Responsible dismantling, recycling and reusing of products, according to local laws and industrial standards.



Maintenance

Systematic and organized maintenance and support over the life cycle of your assets.

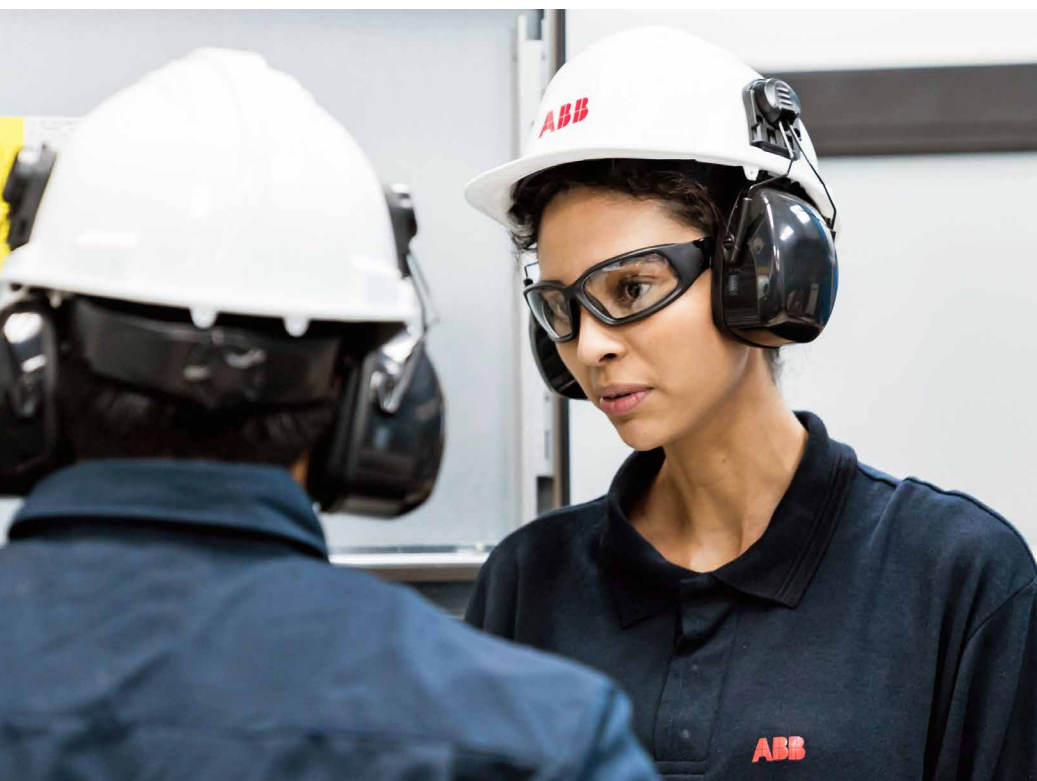



Advanced services

Gain the unique ABB Ability™ digital advantage through data collection and analytics with advanced services.



Extensions, upgrades & retrofits

Up-to-date systems and devices with the best possible performance level.



Engineering & consulting

Ways to identify and improve the reliability, usability, maintainability and safety of your production processes.



Spares & consumables

Authentic, high-quality ABB spares and consumables with quick delivery.



Technical support & repairs

Quick and accurate response during emergencies and efficient support during planned production breaks.



Installation & commissioning

Highly-trained and reliable installation and commissioning experts at your service.



Training

Comprehensive and professional training either at ABB premises or your own.



Agreements

Comprehensive bundling of relevant services into one contract to suit your needs.

Global service network 24/7


“I need operational excellence, rapid response, improved performance and life cycle management.”

ABB Drives Life Cycle Management

A life time of peak performance

You're in control of every life cycle phase of your drives. At the heart of drive services is a four-phase product life cycle management model. This model defines the services recommended and available throughout drives lifespan.


Now it's easy for you to see the exact service and maintenance available for your drives.

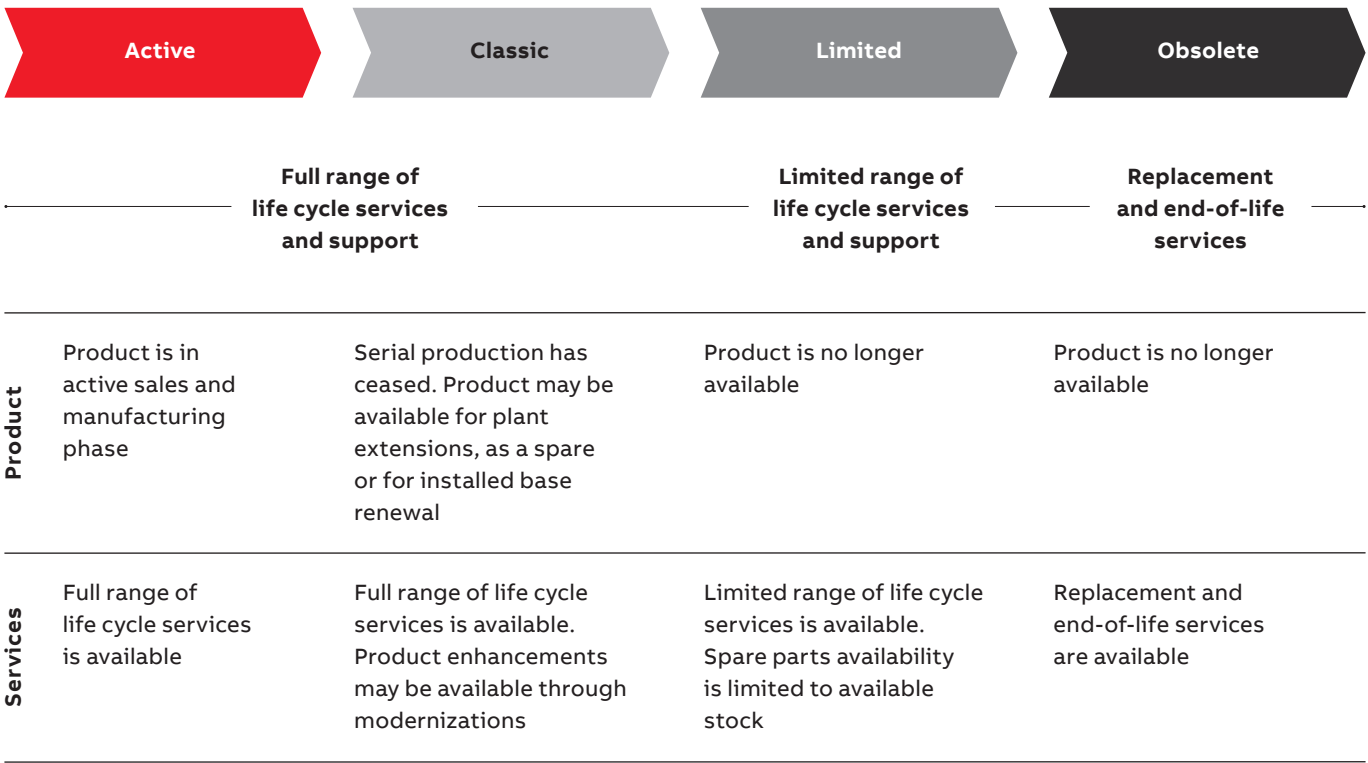

Keeping you informed throughout the life cycle

We notify you every step of the way using life cycle status statements and announcements.

Your benefit is clear information about your drives' status and precise services available. It helps you plan the preferred service actions ahead of time and make sure that continuous support is always available.

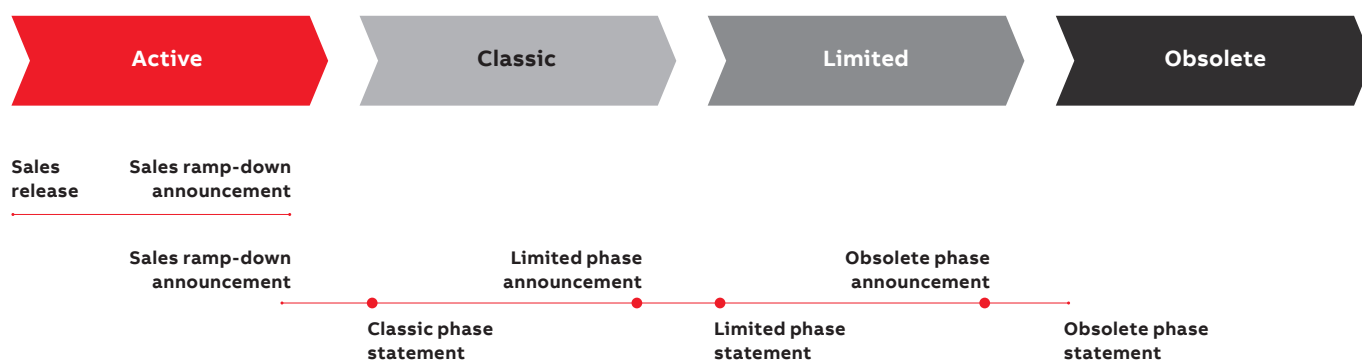

Sales release

Details about product portfolio and release schedule.

Sales ramp down announcement

Last time buy and last deliveries dates, informed well in advance.

Life cycle phase change announcement

Early information about the upcoming life cycle phase change and affects on the service availability. Informed well in advance, minimum six months prior to the change.

Life cycle phase statement

Information about the current life cycle status, product and services availability and recommended actions. Plan for the next life cycle phase transition.



Notes

For more information, please contact your local ABB representative or visit

new.abb.com/drives

new.abb.com/drives/drivespartners

new.abb.com/motors-generators