

RED Sounder, ROLP/R/D

SOUNDERS / SPEEKERS / AUDIBLE ALARM (HORN)
(NON HAZARDOUS (ZONED) AREAS)

- IP 65
- 32 tones and 2 volume level
- Power voltage 18-28V



ISO 9001:2015
Quality management Systems
Système de Qualité
www.sgs.com



Sounders / Speakers / Audible Alarm (Horn) (NON HAZARDOUS (ZONED) AREAS)

Audible signaling is part of the DEGA gas detection system. It is designed as a compact device for installation in non-explosive areas. The wide input voltage band ensures flexible use in many industrial and other applications.

RED Sounder, ROLP/R/D

TECHNICAL SPECIFICATION:


Power voltage:	18-28V/0,012A DC
Audio output:	102dB(A)/32 tones (selected by the user)
Ambient temperature:	-25°C up to +70°C
Construction:	ABS V0
Cover protection level:	IP65
Weight:	0,25 kg
Degree of cover protection:	IP 65
Dimensions(WxHxD):	93x91 mm (diameter x height)



RECOMMENDED ACCESSORIES

DEGA TL III

External reset button for the sounders/speakers
IP65, -25°C +70°C

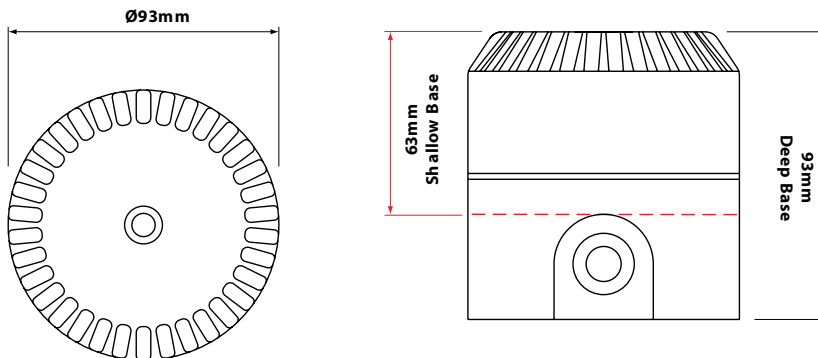

ACCESSORIES:



External power supply 30-240W
with External Mounting
Box